



HOPPER

275S-001 S2 SRC

Standard EN ISO 20345:2011

Sizes 36-48


ESOLIGHT

COMPO
200

METAL
FREE

Three-dimensional Spyder-Net lining with moisture absorption and release properties. Its special three-dimensional and non-deformable textile structure ensures lasting comfort, breathability and elasticity.

SOLID dual density PU guaranties excellent comfort and lightness.

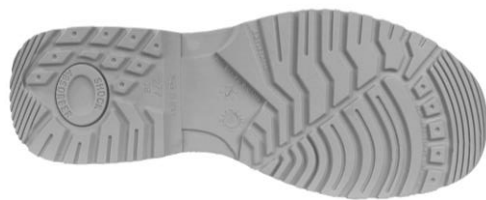

SOLID PU DUAL DENSITY

- SRC Slip resistance sole.
- Fuel oil resistance sole (FO)
- Esolight 1.0+2.0 compound
- Excellent abrasion resistance
- Shock absorbing heel

Water resistant upper made with synthetic material.



Exclusive super flexible system made of dual density polyurethane Esolight 1.0 + 2.0. The Esolight 1.0 midsole is made of lower density micro-cell polyurethane so to increase energy absorption, while the outsole is made by high-density Esolight polyurethane to guarantee durability and slip resistance.

COMPO200 polymeric toe cap: Resistant to an impact of 200 Joules according to European standards. Non-magnetic and light.



SRC Slip resistance

A Antistatic

Resistant to an impact of 200 Joules and compression of 15kN

E Energy absorption at the heel part

FO Fuel oil resistance sole

WRU Water penetration resistant upper

S-02

- Antibacterial
- Perforated polyester fabric = maximum breathability Antibacterial
- Honeycomb design for shock absorption and breathability

