


GENKINS®

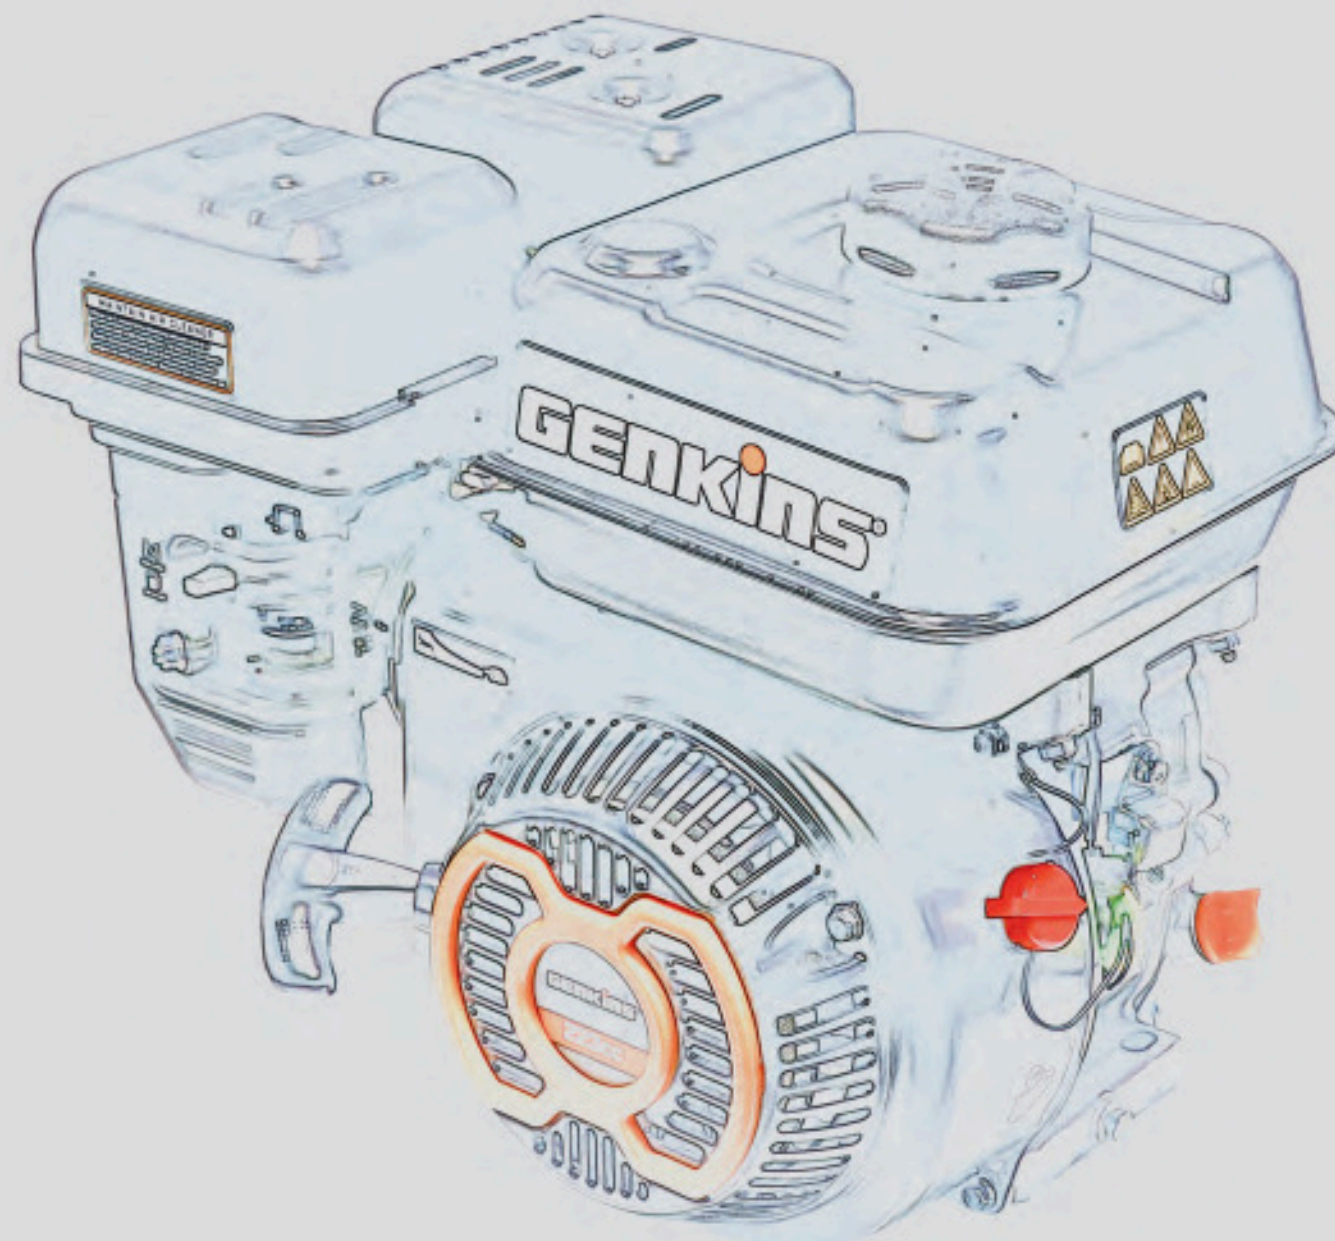

GENKINS®

CHONGQING GENKINS POWER LTD.

No.6 East Gangcheng Loop Road, Jiangbei Dist. Chongqing, China 400026
www.genkins.com
E-mail: info@genkins.com

■ GK1350



- Various application.
- Durable direct connection.
- Strong power for tough work.

Model	GK1350
Dimensions(mm)	1600*1050*1100
Tilling Width(mm)	800-1350
Tilling Depth(mm)	150-300
Shifting Gears	1, 0 (-1) , 2
Transmission Mode	Gear
Engine Model	Diesel LA188FA
Displacement(cc)	418
Max Output(hp.kw/rpm)	10(8.3)/3600
Starting System	Recoil/ Electric Start
Transporting Wheels	4.0-8 /5.0-12
Tilling Blades	3+1+1 group 40pcs
Cont. Load (20 gp)	65
Cont. Load (40 hc)	132

■ ACCESSORIES



Round blade



Anti-winding blades



Deep hoe blades



Curved dryland blades



Potato rake



Iron wheel (anti-slip)



Single side plow



Plow



Ditching blade



Adjustable ditching blade

GENKINS®

www.genkins.com

TILLER

750mm~1350mm



GENKINS®

CHONGQING GENKINS POWER LTD.
No. 6 East Gangsheng Long Road, Gangbei District, Chongqing, China 400025
www.genkins.com
E-mail: info@genkins.com

CE API RESOURCES BOARD

■ GK750



- Best selling model.
- Various applications.
- Lightest aluminum gearbox.

Model	GK750
Dimensions[mm]	1550*850*1050
Tilling Width[mm]	800-750
Tilling Depth[mm]	150-300
Shifting Gears	-1,0,2,1
Transmission Mode	Belt
Engine Model	Gasoline GK210
Displacement[cc]	212
Max Output[hp.kw/rpm]	7(4.4)/3600
Starting System	Recoil Start
Transporting Wheels	3.80-8
Tilling Blades	2+1 group 24pcs
Cont. Load (20 gp)	126
Cont. Load (40 hc)	258

■ GK1000



- Durable direct connection.
- Compact design and lighter weight.

Model	GK1000	GK1000D
Dimensions[mm]	1500*800*1100	1500*800*1100
Tilling Width[mm]	750-1000	750-1000
Tilling Depth[mm]	150-300	150-300
Shifting Gears	1, 0 (-1), 2	1, 0 (-1), 2
Transmission Mode	Gear	Gear
Engine Model	Gasoline GK210	Diesel LA179
Displacement[cc]	212	247
Max Output[hp.kw/rpm]	7(4.4)/3600	5(3.7)/3600
Starting System	Recoil Start	Recoil Start
Transporting Wheels	4.00-8	4.00-8
Tilling Blades	3+1 group 32pcs	3+1 group 32pcs
Cont. Load (20 gp)	86	86
Cont. Load (40 hc)	210	210

■ GK900



- Light weighted.
- Various applications.
- Strong cast iron gearbox.

Model	GK900
Dimensions[mm]	1500*750*1100
Tilling Width[mm]	800-850
Tilling Depth[mm]	150-300
Shifting Gears	-1,0,2,1
Transmission Mode	Belt
Engine Model	Gasoline GK210
Displacement[cc]	212
Max Output[hp.kw/rpm]	7(4.4)/3600
Starting System	Recoil Start
Transporting Wheels	4.0-8
Tilling Blades	3+1 group 24pcs
Cont. Load (20 gp)	105
Cont. Load (40 hc)	210

■ GK1050



- Various application.
- Durable direct connection.
- Strong power for tough work.

Model	GK1050	GK1050D
Dimensions[mm]	1600*1050*1100	1600*1050*1100
Tilling Width[mm]	800-1050	800-1050
Tilling Depth[mm]	150-300	150-300
Shifting Gears	1, 0 (-1), 2	1, 0 (-1), 2
Transmission Mode	Gear	Gear
Engine Model	Gasoline GK380	Diesel LA178
Displacement[cc]	388	298
Max Output[hp.kw/rpm]	11(7.8)/3600	8(4.3)/3600
Starting System	Recoil/ Electric Start	Recoil/ Electric Start
Transporting Wheels	4.0-8 / 5.0-12	4.0-8 / 5.0-12
Tilling Blades	3+1 group 32pcs	3+1 group 32pcs
Cont. Load (20 gp)	65	65
Cont. Load (40 hc)	132	132