




### Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water

### Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.

### Identification Codes

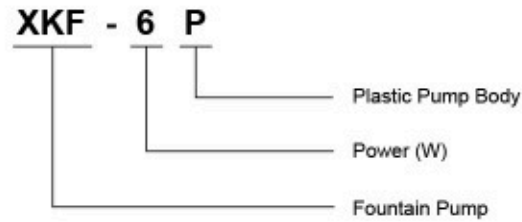


### Application

- Filter of the pond water
- Beautiful ornament for the pond
- Oxygen enrichment of the pond water

### Features

- Plastic casing
- Small, lightweight, durable and reliable
- Various nozzles available for displaying of cascade, water bell, etc.

### Identification Codes

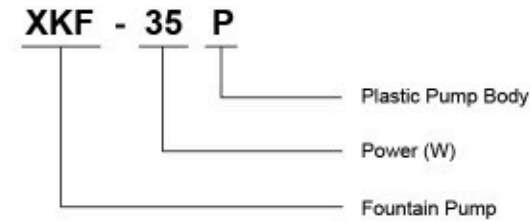

### Technical Data

Model	Voltage	Input Power (W)	Max.Head (m)	Max.Flow (L/h)	Outlet (mm)	Cable
XKF-6P	220V-240V&24V/50Hz	6	0.7	380	13	H05RN-F 10m
XKF-15P	220V-240V&24V/50Hz	15	1.0	850	13	H05RN-F 10m
XKF-20P	220V-240V&24V/50Hz	20	1.1	1100	13	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.

### Technical Data

Model	Voltage	Input Power (W)	Max.Head (m)	Max.Flow (L/h)	Outlet (mm)	Cable
XKF-35P	220V-240V&24V/50Hz	35	1.4	1600	19	H05RN-F 10m
XKF-55P	220V-240V&24V/50Hz	55	2.3	2300	19	H05RN-F 10m
XKF-75P	220V-240V&24V/50Hz	75	2.7	2650	19	H05RN-F 10m
XKF-95P	220V-240V&24V/50Hz	95	3.0	3500	19	H05RN-F 10m
XKF-110P	220V-240V&24V/50Hz	110	3.7	3750	19	H05RN-F 10m

Operating Limits: Fluid temperature up to 35°C; Ambient temperature up to 40°C.